


Erosion and Sediment Control Plan

2200 Honey Ave Pueblo, CO 81003

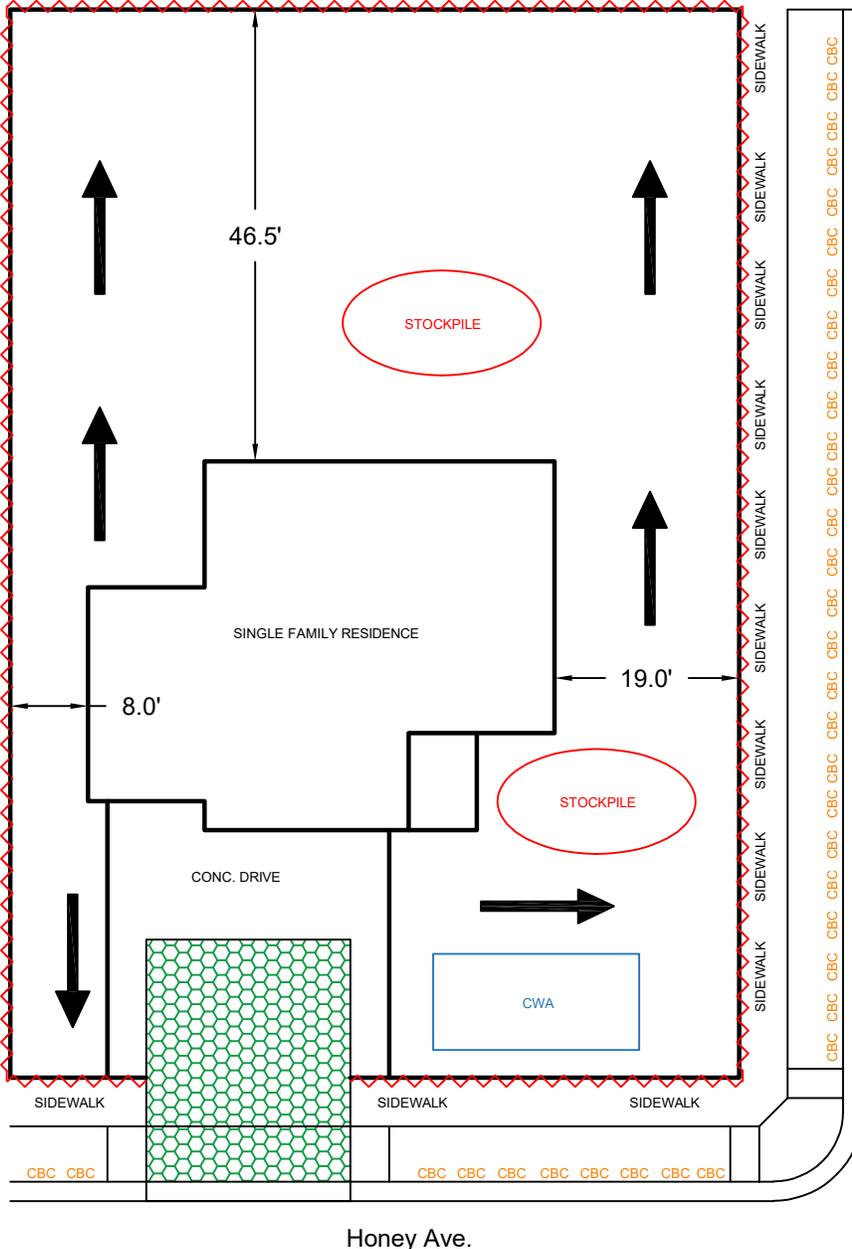

City of Pueblo Notes

- i. Prior to any construction, including site grading and excavation, an approved 'Erosion and Sediment Control Plan' shall be posted on-site and all required BMPs installed.
- ii. General contractor shall maintain and update the 'Erosion and Sediment Control Plan' as construction dictates. Current and correct plan shall always remain on-site and be readily accessible to the City Stormwater Inspector.
- iii. General contractor or his representative shall inspect, at a minimum, the site every 2 weeks and within 24 hours of any precipitation or snowmelt event that causes surface erosion. (i.e., that results in stormwater running across the ground).
- iv. General contractor/owner is fully responsible to maintain all required BMPs to prevent erosion and sediment from leaving the construction site.
- v. Failure to comply with minimum requirements is a violation of City Ordinances.
- vi. No cross-lot drainage permitted. Stormwater shall be directed to the nearest public Right-of-Way (streets & alleys), dedicated drainage easements, and/or City of Pueblo stormwater conveyance system.

BMP LEGEND

- STOCKPILE STOCKPILE/ STAGING AREA
- CWA CONCRETE WASHOUT AREA
- RUNOFF FLOW DIRECTION
- VEHICLE TRACKING CONTROL
- CBC CBC CUTBACK CURB
- SILT FENCE

Refer to the MHFD Criteria Manual: Volume 3 Stormwater Quality for BMP details.